


Digital Panel Meters 40 Series

RTD INPUT DIGITAL PANEL METER

(4 digits, process meter)

Functions & Features

- 4 digit (± 9999) panel meter
- HOLD functions
- High visible, 0.8" (20.3mm) high and bright LED

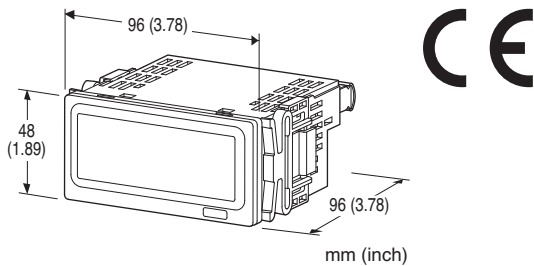

MODEL: 40DR-R1-[1][2]

ORDERING INFORMATION

- Code number: 40DR-R1-[1][2]
- Specify a code from below for each [1] and [2]. (e.g. 40DR-R1-R/Q)
- Specify the specification for option code /Q (e.g. /SET)

INPUT

R1: Pt 100 (JIS'97, IEC)

(Usable range: -200 to +850°C, -328 to +1562°F)

Pt 100 (JIS'89)

(Usable range: -200 to +650°C, -328 to +1202°F)

[1] POWER INPUT

AC Power

K3: 100 - 120V AC

(Operational voltage range 85 - 132 V, 47 - 66 Hz)

L3: 200 - 240V AC

(Operational voltage range 170 - 264 V, 47 - 66 Hz)

DC Power

R: 24 V DC

(Operational voltage range 24 V $\pm 20\%$, ripple 10 %p-p max.)

[2] OPTIONS

blank: none

/Q: With options (specify the specification)

SPECIFICATIONS OF OPTION: Q

EX-FACTORY SETTING

/SET: Preset according to the Ordering Information Sheet (No. ESU-9533)

GENERAL SPECIFICATIONS

Construction: Panel flush mounting

Connection: M3 screw terminals (torque 0.6 N·m)

Screw terminal: Nickel-plated steel

Housing material: Flame-resistant resin (gray)

Isolation: Input to power

Linearization: Standard

A/D conversion: $\Sigma - \Delta$

Sampling rate: 10 times/sec. (100 msec.)

Averaging: None or moving average

Setting: (Front button)

- Temperature unit
- Moving average
- Brightness
- Others

DISPLAY

Display: 4 digits of 20.3 mm (0.8 inch) height, 7-segment, red LED

Display range: -9999 to 9999

Decimal point position: 10^{-1} or none

Zero indication: Higher-digit zeros are suppressed.

Over-range indication:

'S.ERR' blinks surpassing the permissible range.

'B.ERR' blinks at burnout.

Engineering unit indication: Sticker label attached

DC, AC, mV, V, kV, μ A, mA, A, kA, mW, W, kW, var, kvar, Mvar, VA, Hz, Ω , k Ω , M Ω , cm, mm, m, m/sec, mm/min, cm/min, m/min, m/h, m/s², inch, l, l/s, l/min, l/h, m³, m³/sec, m³/min, m³/h, Nm³/h, N·m, N/m², g, kg, kg/h, N, kN, Pa, kPa, MPa, t, t/h, °C, °F, %RH, J, kJ, MJ, rpm, sec, min, pH, %, ppm, etc.

INPUT SPECIFICATIONS

■ RTD (3-wire)

Maximum leadwire resistance: 10 Ω per wire

Sensing current: Approx. 0.5 mA

Conformance range:

Pt100 (JIS'97, IEC) -200 to +850°C or -328 to +1562°F

Pt100 (JIS'89) -200 to +650°C or -328 to +1202°F

Operational range: -230 to +880°C or -382 to +1616°F

■ **Hold Input:** Dry contact input

Detecting level: ≤ 1.5 V

Sensing: Approx. 5V, 1 mA DC

INSTALLATION

Power consumption

•AC:

Approx. 1.3 VA for 100 - 120 V

Approx. 1.2 VA for 200 - 240 V

•DC: Approx. 0.5 W

Operating temperature: -10 to +55°C (14 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Panel flush mounting

Weight: 160 g (0.35 lb)

PERFORMANCE

Accuracy

-200 - +200°C: $\pm 0.2^\circ\text{C}$ rdg ± 1 digit

200 - 850°C: $\pm 0.6^\circ\text{C}$ rdg ± 1 digit

-328 - +1562°F: $\pm 1^\circ\text{F}$ rdg ± 1 digit

Temp. coefficient: $\pm 0.1^\circ\text{C}/^\circ\text{C}$

Line voltage effect: ± 1 digit over voltage range

Insulation resistance: $\geq 100\ \text{M}\Omega$ with 500 V DC

Dielectric strength: 1500 V AC @1 minute (input to power to ground)

STANDARDS & APPROVALS

CE conformity:

EMC Directive (2004/108/EC)

EMI EN 61000-6-4: 2007

EMS EN 61000-6-2: 2005

Low Voltage Directive (2006/95/EC)

EN 61010-1: 2001

Installation Category II


Pollution Degree 2

Input to power: Reinforced insulation (300 V)


DISPLAY HOLD COMMAND

Displayed value is held with an external HOLD command input. Connect the contacts across HOLD to COM.


(a) 5V-CMOS

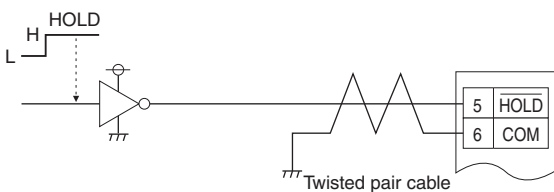


(b) Transistor

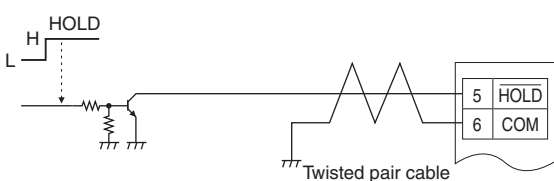


(c) Photo-Coupler

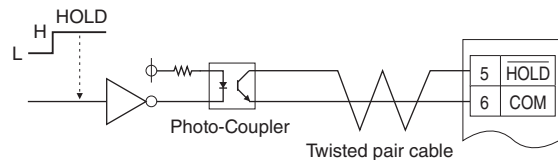

(d) Relay

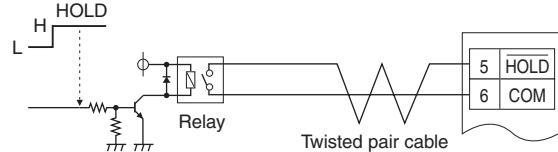

EXTERNAL VIEW

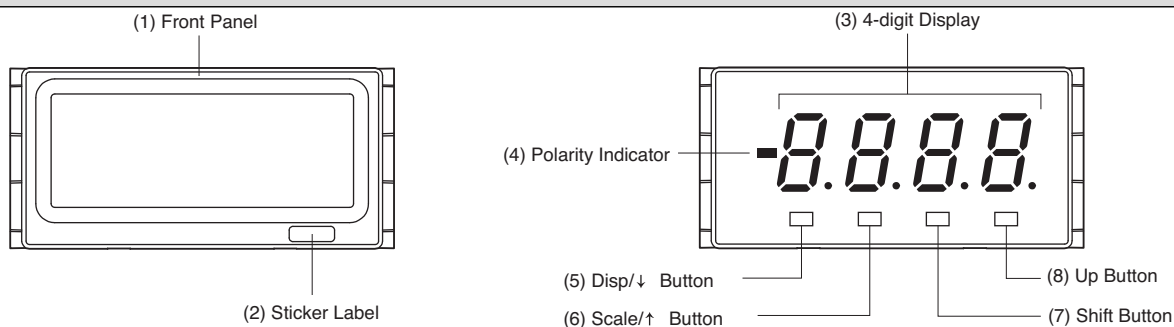

■ COMPONENT IDENTIFICATION

No.	COMPONENT	FUNCTIONS
(1)	Front panel	Removed at conuguration.
(2)	Sticker label	Engineering unit label position
(3)	4-digit display	4-digit LED display. Range: 0 to 9999 (not including decimal point)
(4)	Polarity indicator	Turns on when negative value is displayed
(5)	Disp/↓ button	Used to move on to the display setting modes; or to shift through setting items in each setting mode.
(6)	Scale/↑ button	Used to move on to the zero/span adjustment modes; or to shift through setting items in each setting mode.
(7)	Shift button	Used to move on to the setting standby status and shift through display digits in each setting item.
(8)	Up button	Used to select setting value.

PARAMETER LIST

■ ZERO & SPAN ADJUSTMENTS

PARAMETER	DISPLAY	FUNCTION	INPUT CODE	DEFAULT VALUE
Zero adjustment	-9999-9999	Adjustment value for -200°C To distinguish from span adjustment, the first decimal point is blinking	R1	-2000
Span adjustment	-9999-9999	Adjustment value for 850°C	R1	8500
Temperature unit	[F	Display in Celsius Display in Farenheit (Temperature range: -328 to 1562°F)*1	R1	[
Decimal Point Position	10 ⁻¹ or none	Decimal point position for celsius	R1	8888

*1. For Farenheit, the value is rounded to integer. Decimal point position setting is not available.

■ DISPLAY SETTING MODE


PARAMETER	DISPLAY	FUNCTION	DEFAULT VALUE
Moving Average	<i>rOFF</i>	No moving averaging	<i>R 4</i>
	<i>R 2</i>	Moving average with 2 samples	
	<i>R 4</i>	Moving average with 4 samples	
	<i>R 8</i>	Moving average with 8 samples	
	<i>R 16</i>	Moving average with 16 samples	
Brightness	<i>C 1</i>	Brightness level 1 (dark)	<i>C 5</i>
	<i>C 2</i>	Brightness level 2	
	<i>C 3</i>	Brightness level 3	
	<i>C 4</i>	Brightness level 4	
	<i>C 5</i>	Brightness level 5 (bright)	
Initialization	<i>rOFF</i>	Non-initialization	<i>rOFF</i>
	<i>rSET</i>	Initialize settings (change to factory settings) *1	
Version Indication	-	Version number, indication only	-

*1. While "rSET" is shown, pressing Disp/↓ button or Scale/↑ button initializes settings.


Activating "initialization" of Lockout Setting Mode, Ex-factory settings (/SET) or user's specified parameters will be deleted and overwritten with the factory default values. Notice that after this, Ex-factory settings with will be irrecoverable.

DIMENSIONS unit: mm (inch)


■ TOP VIEW

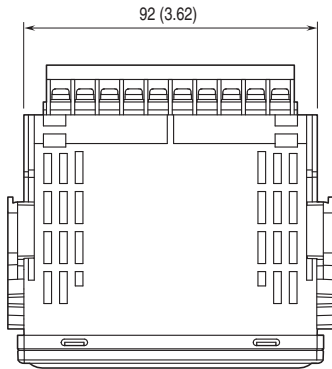


■ FRONT VIEW

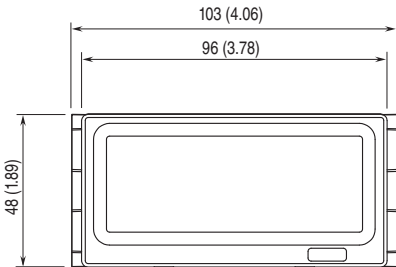


■ SIDE VIEW



■ REAR VIEW

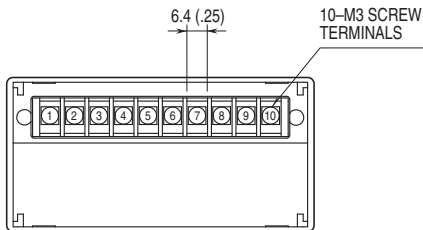


PANEL CUTOUT unit: mm

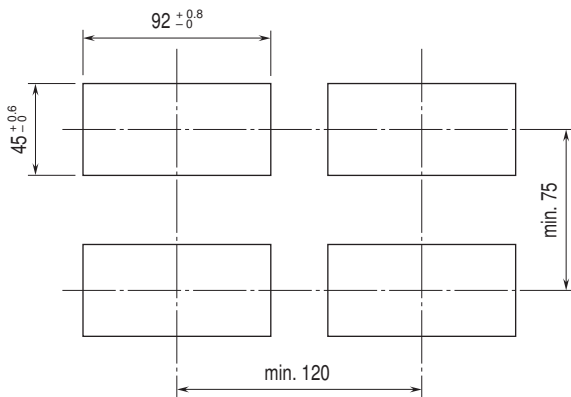

Panel thickness: 1.6 to 8.0 mm

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

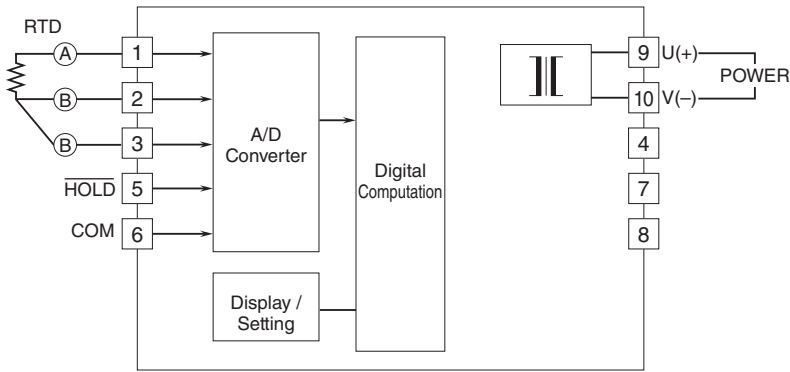

Specifications are subject to change without notice.