

# Unitronics 4G Routers

## LTE & WiFi Industrial Cellular Routers

New 4G/LTE & WiFi cellular Routers support embedded SMS functionality, RS232, RS485, GNSS (GPS), Micro-SD, USB interface, and on-board Digital & Analog I/Os.

### Hardware Configuration Models:

**UCR-ST-B5**

4G LTE & WiFi cellular router with 2 Ethernet ports and Digital I/O.



**UCR-ST-B8**

Dual-SIM 4G LTE & WiFi cellular router with 4 Ethernet ports. Digital & Analog I/Os, RS232, RS485, GNSS (GPS), microSD & USB interface.




→ Unitronics' new UCR Routers integration with UniStream™ series allow easy SMS control - Sending and receiving SMS messages via Ethernet.

### Accessories:

**UCR-OP-B5-DIN - UCR B5/B8 DIN RAIL KIT**

- ✓ Secure
- ✓ Easy to Use
- ✓ Rich Features
- ✓ High Performance
- ✓ Remote Monitoring & Control
- ✓ Suitable for Multiple Sectors
- ✓ Flexible
- ✓ Embedded Firewall
- ✓ Multiple VPN Options
- ✓ Compact & Low Weight
- ✓ Immediate Product Supply
- ✓ Supporting Various Encryption Protocols

# UCR-ST-B5 4G LTE & WiFi cellular router with 2 Ethernet ports and I/O

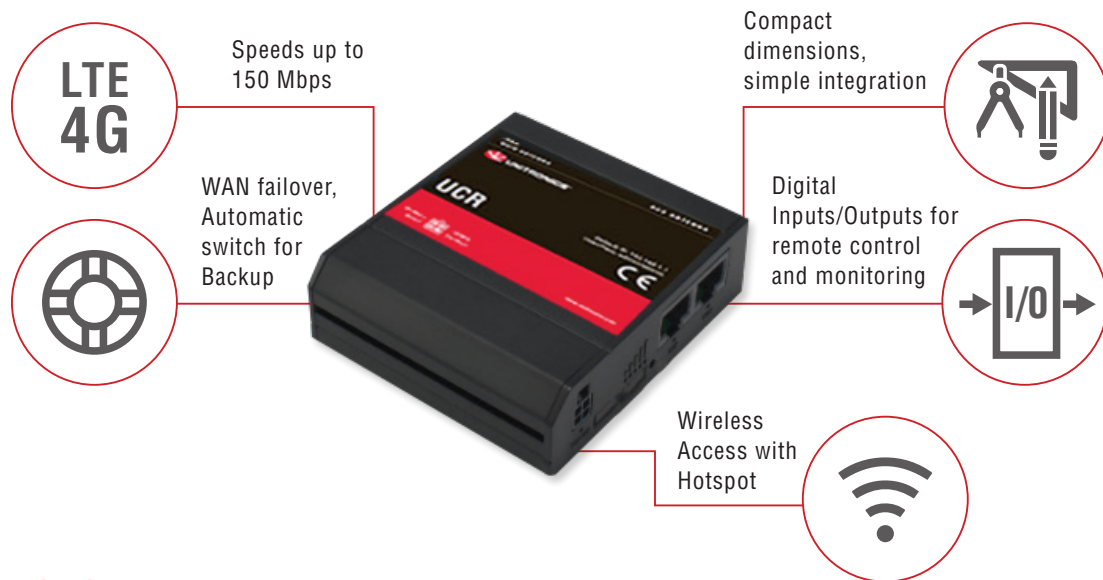


## Hardware

<b>Mobile</b>	4G ( LTE) Cat 4 DL up to 150 Mbps, UL up to 50 Mbps; DC HSPA+; UMTS; TD SCDMA; EDGE; GPRS
<b>CPU</b>	Atheros Hornet, MIPS 24 Kc, 400 MHz
<b>Memory</b>	16 MB Flash, 64 MB DDR 2 RAM
<b>Ethernet</b>	2x 10 100 Ethernet ports: 1 x WAN ( configurable as LAN), 1 x LAN
<b>Power Supply</b>	9 - 30 VDC, 4 pin DC connector
<b>PoE (passive)</b>	Passive PoE over spare pairs ( available from HW revision 0007 and batch number 0010 ). Possibility to power up through LAN port, not compatible with IEEE 802.3 af and 802.3 at
<b>Inputs/Outputs</b>	1x Digital Input, 1 x Digital Open Collector Output on power connector
<b>Connectors</b>	1x 4 pin DC, 2 x Ethernet, 2 x Mobile SMA, 1 x WiFi RP SMA
<b>SIM</b>	1x external SIM holder
<b>Status LEDs</b>	2x connection type status, 5 x connection strength, 2 x LAN status, 1 x Power
<b>Operating Temperature</b>	-40 C to 75 C
<b>Housing</b>	Aluminum housing, plastic panels
<b>Dimensions</b>	83mm x 74 mm x 25 mm
<b>Weight</b>	125 g

## Unitronics Software Features

Dynamic DNS
Multiple VPN Protocols
Wireless Access Point and Wireless Client
Firewall
I/O Control
MQTT Broker
Modbus TCP and Modbus RTU
NTP Server

# UCR-ST-B8 Dual-SIM 4G LTE & WiFi cellular router with 4 Ethernet ports

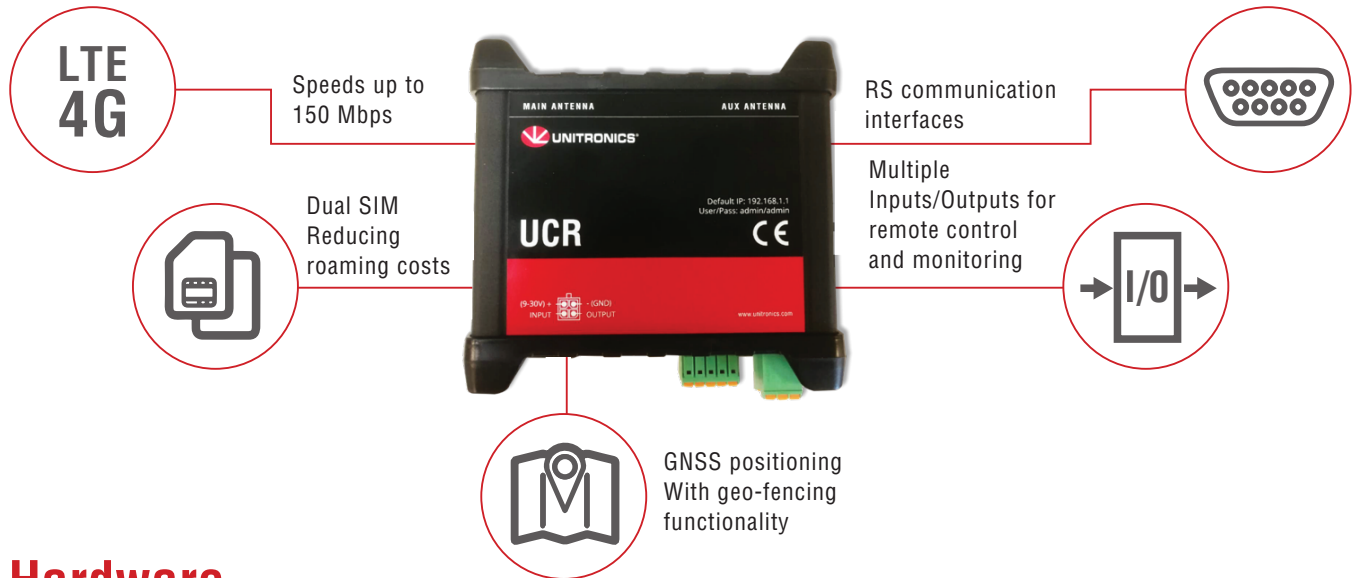

## Hardware

<b>Mobile</b>	4G (LTE) Cat 4 DL up to 150 Mbps, UL up to 50 Mbps; DC HSPA+; UMTS; TD SCDMA; EDGE;GPRS
<b>CPU</b>	Atheros Wasp, MIPS 74 Kc, 550 MHz
<b>Memory</b>	16MB Flash, 128 MB DDR 2 RAM
<b>Ethernet</b>	4x 10 100 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN ports
<b>Power Supply</b>	9 - 30 VDC, 4 pin DC connector
<b>PoE (passive)</b>	Passive PoE over spare pairs (available from HW revision 0007 and batch number 0010). Possibility to power up through LAN port, not compatible with IEEE 802.3 af and 802.3 at
<b>Inputs/Outputs</b>	3x Inputs ( Digital, Digital galvanically isolated, Analog) + 1 x Digital Input on power connector
<b>Connectors</b>	1x 4 pin DC, 4 x Ethernet, 2 x Mobile SMA, 2 x WiFi RP SMA , 1 x GPS SMA, 1 x RS 232 , 1 x 6 pin
<b>Memory Cards</b>	microSD, Hinge Type slot
<b>SIM</b>	2x external SIM holders
<b>Status LEDs</b>	1x bi color connection status, 5 x connection strength, 4 x LAN status, 1 x Power
<b>Operating Temperature</b>	-40 C to 75 C
<b>Housing</b>	Aluminum housing, plastic panels
<b>Dimensions</b>	100mm x 110 mm x 50 mm
<b>Weight</b>	287 g

## Unitronics Software Features

<b>Dynamic DNS</b>
<b>Multiple VPN Protocols</b>
<b>Wireless Access Point and Wireless Client</b>
<b>GPS Geo-fencing</b>
<b>Firewall</b>
<b>I/O Control</b>
<b>MQTT Broker</b>
<b>Modbus TCP and Modbus RTU</b>
<b>NTP Server</b>