


TECHNIACAL SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC DIE-CAST/NICKEL
RATED CURRENT	4A
RATED VOLTAGE	250V
OUTER CABLE JACKET MATERIAL/COLOR	PUR/GREEN
CONDUCTOR INSULATION MATERIAL	PE
NUMBER OF CONDUCTORS(AWG)	4×22AWG+SHIELD
OPERATING TEMPERATURE	-25°C~ + 85°C
PROTECTION CLASS	IEC IP67,IN MATED CONDITION
XXXXXX	XXXXXX


REV	CHG.	DATE	DESCRIPTION	REVISION

FEMALE END VIEW




1.YE
2.WH
3.OR
4.BU

MALE END VIEW




12345678

1.YE
2.OR
3.WH
4.N/C
5.N/C
6.BU
7.N/C
8.N/C

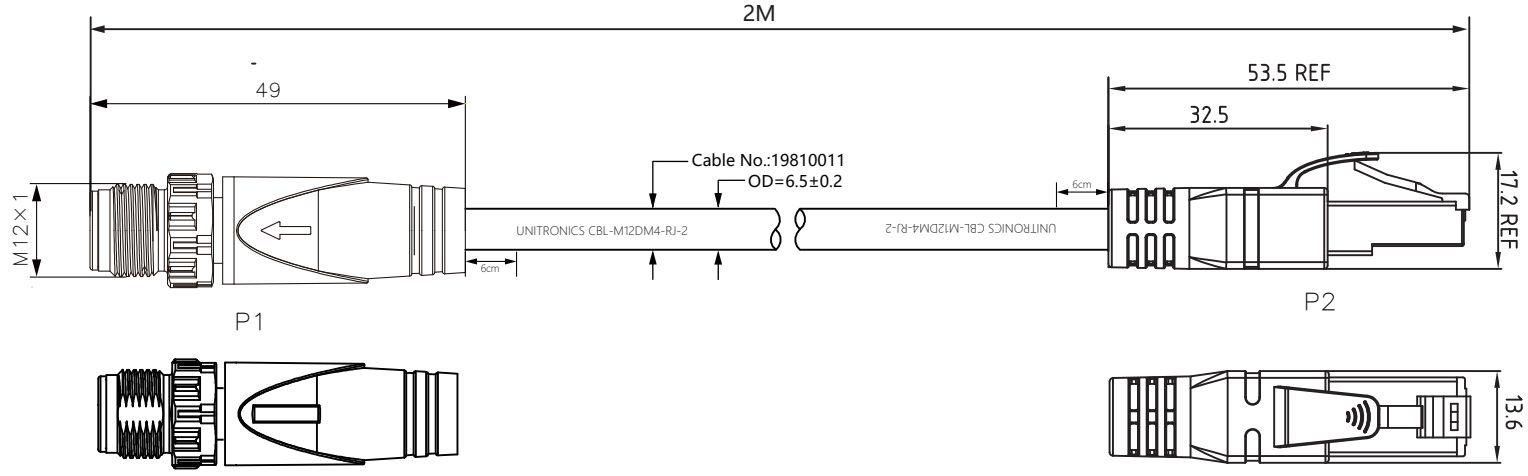

SOURCE DRAWING-FOR REFERENCE ONLY

APPROVED BY		DATE	
CHECKED BY	ALEX	DATE	
DRAWING BY		DATE	2023.8.9
TOLERANCE UNLESS OTHERWISE SPECIFIED	CABLE LENGTH	TOLERANCE	
	ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0%(OR 0mm) OF LENGTH WHICHEVER IS GREATER	
	STRIP LENGTH	TOLERANCE	
	0-7mm	±1.0mm	
	8-29mm	±1.5mm	
	30-49mm	±2.0mm	
50-69mm	±3.0mm		
70-100mm	±4.0mm		
over 100mm	±5.0mm		




UNITRONICS®

UNITS: mm

DESCRIPTION: CBL-M12DM4-RJ-2

1st Angle Projection



PART NO.

REV	A	SHEET	1 OF 1
-----	---	-------	--------