

0

Confusion Matrix

VISION SYSTEMS - VISION SENSORS - VISION SOFTWARE



CONVE

COGI



THE GLOBAL LEADER In machine vision and industrial barcode reading

Cognex,[®] the leading supplier of machine vision and industrial barcode reading solutions.

With over 2 million systems installed in facilities around the world and over thirty seven years of experience, Cognex is focused on industrial machine vision and image-based barcode reading technology. Deployed by the world's top manufacturers, suppliers and machine builders, Cognex products ensure that manufactured items meet the stringent quality requirements of each industry.

Cognex solutions help customers improve manufacturing quality and performance by eliminating defects, verifying assembly and tracking information at every stage of the production process. Smarter automation using Cognex vision and barcode reading systems means fewer production errors, which equates to lower manufacturing costs and higher customer satisfaction. With the widest range of solutions and largest network of global vision experts, Cognex is the best choice to help you **Build Your Vision.**™



OVER 37 YEARS IN THE BUSINESS

500+ CHANNEL PARTNERS

GLOBAL OFFICES IN 20+ COUNTRIES 2,000,000+ SYSTEMS SHIPPED



OPTIMIZE QUALITY, MINIMIZE WASTE, MAXIMIZE THROUGHPUT

Tens of thousands of applications worldwide inspect billions of products each day, many products that simply could not be manufactured without machine vision technology. Whether verifying the fill levels of soda bottles traveling on a conveyor, reading oil-stained codes on automotive parts or positioning touch screens on smartphones to micron-level accuracy, machine vision technology performs highly-detailed tasks on high-speed production lines.

34DRTDD1FRD

RTOO

Cognex comprehensive line of vision sensors and 2D and 3D vision systems all use machine vision technology to perform inspections but are engineered for			
different tasks.	Vision Sensors	2D Vision	3D Vision
Presence/Absence	\checkmark	\checkmark	\checkmark
Q Defect Detection	\checkmark	\checkmark	\checkmark
Assembly Verification	\checkmark	\checkmark	\checkmark
Q Cosmetic Inspection		\checkmark	\checkmark
Guide/Align		\checkmark	\checkmark
D3/D4 XYZB OCR/OCV		\checkmark	\checkmark
Code Reading		\checkmark	
Gauge/Measure		\checkmark	\checkmark




INDUSTRY-LEADING VISION TECHNOLOGY



Deep Learning

Deep learning technology uses neural networks that mimic human intelligence to distinguish anomalies, locate deformed parts and read challenging characters while tolerating natural variations in complex patterns. Deep learning complements traditional machine vision approaches, which struggle to appreciate variability and deviation between visually similar parts. In factory automation, VisionPro ViDi can now perform judgment-based part location, inspection, classification, and character recognition more effectively than humans or traditional machine vision solutions.

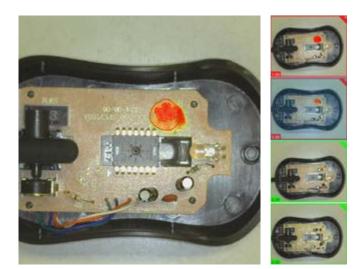




Industry Leading Object Location

PatMax RedLine[™] is an accurate, highly repeatable tool that locates trained patterns no matter the size, rotation, or location of the target part. It is ideal for industries and applications that require large fields of view, high accuracy, large angle

and scale tolerances, and multiple targets.

PatMax® 3D is an accurate 3D vision tool that locates trained patterns based on its 3D geometry under 6 degrees of freedom (X, Y, Z, Rx, Ry, Rz). It finds 3D objects within a 3D point cloud image and is ideal for locating and identifying objects which are tilted, stacked or not properly seated with a fixture.








Advanced Image Formation Technology


HDR+ is a patent-pending technology that delivers a high-contrast, uniform image in a single acquisition for multi-point inspections of parts with

SurfaceFX[™] uses lighting and software algorithms to remove noise and clutter from the surface background and isolate features and defects that are recessed or embossed on parts. It highlights surface defects such as chips, wrinkles, punctures, stamped text, and codes so

varying depths of field and lighting conditions.

other vision tools can perform their tasks.







High-Performance 3D Vision

Patent-pending 3D LightBurst technology acquires high-resolution 3D images at an unparalleled speed. It delivers a full field-of-view 3D image as fast as 200 milliseconds, allowing higher throughput and shorter cycle times for time-critical in-line applications.





Code Reading

2DMax® with PowerGrid® is a breakthrough algorithm and technology designed to read 2D codes with significant damage to or complete elimination of a code's finder or clocking pattern, or quiet zone.

1DMax[®] with Hotbars[®] is an algorithm and technology optimized for omnidirectional 1D barcode reading, decoding up to 10X the speed of a conventional barcode reader.

OCRMax[™], a font-trainable Optical Character Recognition and Verification (OCR and OCV) tool, has set industry records for ease of use, read rates and speed in complex images. This powerful algorithm prevents misreads, handles process variations, and provides easy font management.





2D VISION SYSTEMS

Cognex In-Sight[®] 2D vision systems are unmatched in their ability to inspect, identify, and align parts. These self-contained, industrial-grade vision systems combine a library of advanced vision tools with high-speed image acquisition and processing. A wide range of models, including line scan and color systems, meet most price and performance requirements.



In-Sight 7000 Series

Combines modular integrated lighting and optics for optimal image formation with powerful vision tools and ease of use in a compact footprint for fast, accurate inspections on space-constrained production lines.

















In-Sight 8000 Series

Ultra-compact, standalone vision systems deliver industry-leading vision tool performance at PC speeds, all in the micro form factor of a typical GigE Vision camera.

RESOLUTION





FEATURES



In-Sight 9000 Series

Rugged, ultra-high-resolution standalone vision systems equipped with a full suite of In-Sight vision tools solve high accuracy part location, measurement, and inspection applications. Line scan and area scan image acquisition options are available for imaging large continuously moving or stationary objects.

50 mm

98 mm

53.4 mm

RESOLUTION




Area Scan: Up to 12MP Line Scan: Up to 32MP



In-Sight 9912 Area Scan

Standalone, ultra-high-resolution 12MP, vision system acquires and processes exceptionally detailed images for high accuracy part location, measurement, and inspection over a large area—even when mounted at longer distances.

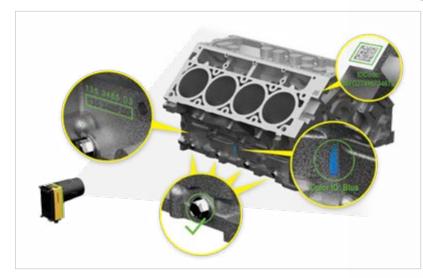

In-Sight 9902 Line Scan

Self-contained vision systems ideal for detailed inspections of large, cylindrical, or continuously moving objects. 1K and 2K modes deliver high-resolution images that can used to detect even the smallest features and defects.





Visit www.cognex.com/vision-systems

VISION SENSORS

Vision sensors perform simple pass/fail applications that help ensure products and packaging manufactured on an automated production line are error-free and meet stringent quality standards. Cognex vision sensors provide highly reliable inspections thanks to powerful vision tools, integrated lighting, modularity, and an easy-to-use setup environment.

In-Sight 2000 Series


Ideal for solving error-proofing applications, these vision sensors set new standards for value, ease of use, and flexibility and can adapt to virtually any production line environment.

In-Sight 2000 Mini

All the power of the In-Sight 2000 vision sensor in an ultra-compact form factor allows users to deploy vision sensors in machines or production lines with limited mounting space.


RESOLUTION

FEATURES













UP to 92 mm

52 mm

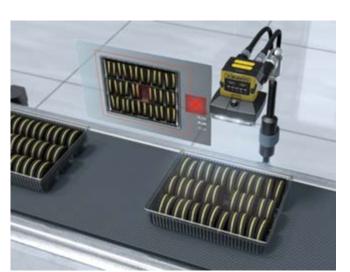



MODULAR DESIGN FOR MAXIMUM FLEXIBILITY

When it comes to factory automation, one size rarely fits all. That's why many In-Sight vision systems and vision sensors are designed with modular lights, lenses, and filters. These field-changeable and user-configurable options provide users with ultimate flexibility to customize the system for their specific application and easily adjust as needs change.



White, blue, red, and IR LED lights minimize the need for expensive external


lighting and enhance specific features or text.



Original color image, ambient light



Monochrome camera image with blue light

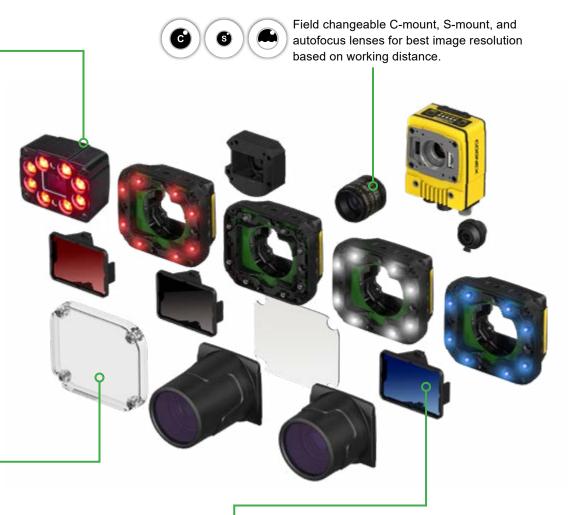

Polarizers reduce glare or hot spots and enhance contrast so entire objects can be recognized.



No filter specular glare




With a linear polarizer

Color filters create contrast to lighten or darken features of the object.







Original color image No filter


Blue Bandpass Filter



IN-SIGHT 2D VISION SOFTWARE

In-Sight Explorer

All In-Sight 2D products, from vision sensors to vision systems, are configured with the powerful, yet intuitive In-Sight Explorer software. The easy-to-use interface walks you step by step through the setup process and provides the power and flexibility of the vision spreadsheet for more difficult applications. In-Sight Explorer also offers the widest range of built-in communication protocols that interface directly to any PLC, robot, or HMI on the factory network.

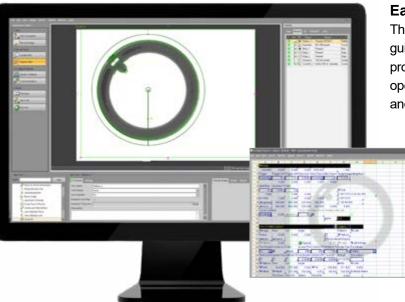

EasyBuilder

The EasyBuilder configuration environment guides users through a step-by-step setup process allowing both novice and experienced operators to configure vision applications quickly and easily on vision sensors and vision systems.

Spreadsheet

Access to the spreadsheet provides ultimate application development flexibility without programming.

Easy-to-deploy HMI

Cognex In-Sight sensors and systems offer multiple runtime visualization options, including VisionView — available as a ready-to-deploy LCD touch panel and as a PC application — and a platform independent Web HMI that runs in any internet browser. Both VisionView and the Web HMI allow users to view inspection images and results and to modify setup parameters.



2D VISION APPLICATIONS

Automotive



Food & Beverage








Electronics







Pharmaceutical









2D VISION SENSORS AND VISION SYSTEMS SPECIFICATIONS

	2000 Series	5705 Series	7000 Series	8000 Series	9000 Series	
Image						
Imager Type	Monochrome/Color Area Scan	Monochrome/Color Area Scan	Monochrome/Color Area Scan	Monochrome/Color Area Scan	Monochrome/Color Area Scan, Monochrome line scan	
Resolution	Up to 0.5MP (800 x 600)	5MP (2448 x 2048)	Up to 5MP (2448 x 2048)	Up to 5MP (2592 x 1944)	12MP (4096 x 3000), 32MP (2048 x up to 16,384 lines) for line scan	
Acquisition Speed (Max)	75 fps	16 fps	Up to 217 fps	Up to 217 fps	Up to 14 fps, 66K lines per second for line scan	
Options						
Lenses	S-Mount, Autofocus	C-Mount	C-Mount, S-Mount, Autofocus	C-Mount	C-Mount	
Lighting	Integrated	N/A	Integrated, External light via light control connector	N/A	External light via light control connector (area scan only)	
Networkin	ıg					
Speed		Gi	igabit Ethernet (10/100/1000 Mbp	os)		
General Protocols	TCP/IP, UDP, FTP, Telnet	TCP/IP, UDP, FTP, SFTP, Telnet, SMTP				
Industrial Protocols	EtherNet/IP with AOP, PROFINET, Modbus TCP, SLMP/SLMP Scanner	EtherNet/IP with AOP, PROFINET, Modbus TCP, SLMP/SLMP Scanner, CC-Link IE Field Basic, IEEE 1588 (CIP Sync)		EtherNet/IP with AOP, PROFINET, Modbus TCP, SLMP/SLMP Scanner, CC-Link IE Field Basic	EtherNet/IP with AOP, PROFINET, Modbus TCP, SLMP/SLMP Scanner, CC-Link IE Field Basic, IEEE 1588 (CIP Sync)	
2 1/0						
Trigger input	1	1	1	1	1	
General purpose input	1		2		2	
General purpose output	4	2	2	2	2	
Bi-Directional			2		2 (area scan only)	
Encoder					2 (line scan only)	
Expansion I/O	CIO-1400	CIO-1400, CIO-Micro	CIO-1400, CIO-Micro	CIO-Micro	CIO-1400, CIO-Micro	
Serial	RS-232C					
🗴 Mechanic	al					
Length	In-line: 92 mm (3.61 in), Right-angle: 61 mm (2.42 in)	124.1 mm (4.88 in)	90.1 mm (3.54 in)	75.1 mm (2.95 in)	121.0 mm (4.77 in)	
Width	60 mm (2.38 in)	61.4 mm (2.42 in)	60.5 mm (2.38 in)	31.2 mm (1.23 in)	60.5 mm (2.38 in)	
Depth	52 mm (2.05 in)	52 mm (2.05 in)	Up to 2MP: 35.7 mm (141 in), 5MP: 49.4 mm (1.94 in)	31.0 mm (1.22 in)	53.4 mm (2.10 in)	
Protection	IP65	IP67	IP67	IP40	IP67	

	2000 Series	5705 Series	7000 Series	8000 Series	9000 Series	
	S					
Pattern Matching	\checkmark	✓ Available PatMax and PatMax RedLine				
Blob		\checkmark	\checkmark	\checkmark	\checkmark	
Edge	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	
Measurement	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	
1D/2D Code Reading		V IDMax				
OCR		\checkmark	\checkmark	\checkmark	\checkmark	
Flaw Detection		\checkmark	\checkmark	\checkmark	\checkmark	
Color Verification	\checkmark	~	\checkmark	\checkmark	\checkmark	
Color Identification		\checkmark	\checkmark	\checkmark	\checkmark	
Histogram		\checkmark	\checkmark	\checkmark	\checkmark	
Brightness	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	
Pixel Counting	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	
Contrast	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	
Image Filters		\checkmark	\checkmark	\checkmark	\checkmark	



3D VISION SYSTEMS

Whether performing a single profile measurement or scanning an entire surface in 3D, Cognex has the most powerful and robust 3D vision tools. Manufacturers in all industries trust Cognex technology to deliver high accuracy surface feature measurements that go beyond the capabilities of 2D vision technology.

3D-A5000 Series

State-of-the-art area scan 3D camera captures high-resolution 3D point cloud images in a fraction of the time of current methods. Using unique 3D imaging technology, it solves challenging assembly verification, in-line metrology, and robotic guidance applications.

3D RESOLUTION












DSMax

Fast, high-definition laser displacement sensor for accurate 3D inspections of small, detailed parts. Ideal solution for electronic components which can contain highly reflective or dark features.

3D RESOLUTION FEATURES

SD-Safe P65








DS1000/925B Series

Factory-calibrated displacement sensors perform fast, accurate, high-resolution 3D inspections, measurements, and OCR character reading. Equipped with industry-leading 3D vision tool and delivers results in real-world units.



In-Sight Laser Profiler


A 3D projection-based measurement sensor used to verify dimensionality for gauging and measurement applications. Set up and deployed in 4 simple steps, it provides accurate and reliable measurements directly on the factory floor.



FEATURES










3D VISION APPLICATIONS

Automotive

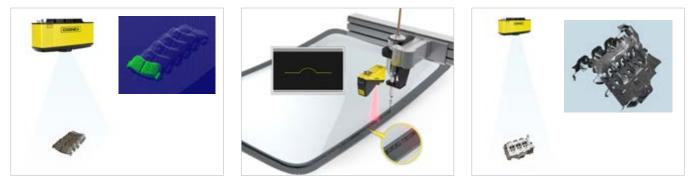

Electronics








Food & Beverage









Consumer Products







3D VISION SYSTEMS SPECIFICATIONS

3D-A5000 Series

	3D-A5060	3D-A5030	3D-A5005	
3D Technology	3D LightBurst Area Scan			
Clearance Distance (CD)	1400.0 mm (55.1 in)	1465.0 mm (57.7 in)	299.3 mm (11.8 in)	
Measurement Range (MR)	400.0 mm (15.7 in)	80.0 mm (3.1 in)	12.0 mm (0.5 in)	
Near FOV	520 x 390 mm (20.1 x 15.4 in)	280 x 210 mm (11.0 x 8.3 in)	60 x 44 mm (2.4 x 1.7 in)	
Far FOV	645 x 490 mm (25.4 x 19.3 in)	285 x 216 mm (11.2 x 8.5 in)	65 x 46 mm (2.6 x 1.8 in)	
Resolution XY	361–454 µm	195–200 μm	42–44 μm	
Resolution Z	338–690 µm	178–213 μm	7–8 µm	
Acquisition Time	200 msec			
Protection	IP65			
Software	VisionPro & Cognex Designer			

DSMax

	DSMax32T			
3D Technology	Laser Displacement Sensor			
Clearance Distance (CD)	51.4–62.3 mm (2.0–2.5 in)			
Measurement Range (MR)	10.9 mm (0.4 in)			
Near FOV	30 mm (1.2 in)			
Far FOV	31.5 mm (1.2 in)			
Resolution XY	14.6–15.4 μm			
Resolution Z	2.5–2.8 μm			
Acquisition Rate	Up to 18 KHz			
Protection	IP67			
Software	VisionPro & Cognex Designer			

DS1000/900 Series 3D and In-Sight Laser Profiler

	DS1300	DS1101	DS1050	DS925B	DS910B
3D Technology	Laser Displacement Sensor				
Clearance Distance (CD)	180 mm (7.1 in)	135 mm (5.3 in)	87 mm (3.4 in)	53.5 mm (2.1 in)	52.5 mm (2.1 in)
Measurement Range (MR)	725 mm (28.5 in)	220 mm (8.7 in)	76 mm (3.0 in)	25 mm (1.0 in)	8 mm (0.3 in)
Near FOV	90 mm (3.5 in)	64 mm (2.5 in)	43 mm (1.7 in)	23.4 mm (1.0 in)	9.4 mm (0.4 in)
Far FOV	410 mm (16.1 in)	162 mm (6.4 in)	79 mm (3.1 in)	29.1 mm (1.1 in)	10.7 mm (0.4 in)
Resolution XY	101–457 µm	79–181 µm	59–90 µm	18.3–22.7 µm	7.3–8.4 µm
Resolution Z	16–265 μm	10–52 µm	4–14 µm	2 µm	1 µm
Acquisition Rate	Up to 10 Hz			Up to 1.2 KHz	
Protection	IP65				
Software	In-Sight VC Explorer with EasyBuilder, VisionPro & Cognex Designer				




VISION SOFTWARE

Cognex vision software provides the power and flexibility to solve your most challenging machine vision applications in a PC environment. It enables the highest speed applications with the flexibility to choose the camera needed for your vision application. It addition to the programmatic interfaces provided across the vision software products, VisionPro and Cognex Designer make application development easier than ever through their graphical development environments.


VisionPro

A powerful development environment to tackle any vision challenge. VisionPro enables the rapid development of sophisticated vision software through its extensive tool prototyping that allow you to visually define and tune your application. VisionPro's seamlessly integrated programming interface enables the deployment of highly-customizable applications on your PC platform.

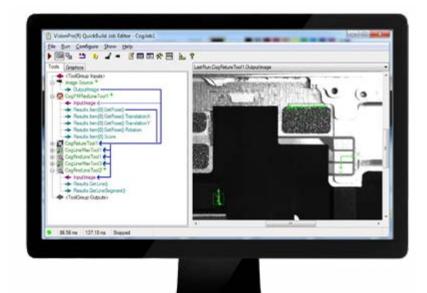



PatMax Object location







Blob Analysis Geometric analysis

VisionPro ViDi

A best-in-class, deep learningbased image analysis software library for complex and humanlike inspection applications in the same environment as machine vision tools.


This novel approach solves complex applications that are too difficult or time-consuming for traditional machine vision systems. It finds unpredictable defects while tolerating normal part and lighting variations.



Finds and counts complex features and objects














Detects anomalies and cosmetic defects





Reads challenging, deformed characters



Cognex Designer

Cognex Designer combines the power and flexibility of VisionPro with an intuitive graphical interface. Cognex Designer enables developer efficiency by simplifying HMI creation and application integration.





Cognex Vision Library (CVL)

Comprehensive C++ software vision library to provide the ultimate application development flexibility.

Vision Accessories

A wide variety of industrial cameras, frame grabbers, and I/O factory communication cards for system flexibility.





BUILD YOUR VISION

2D VISION

Cognex machine vision systems are unmatched in their ability to inspect, identify and guide parts. They are easy to deploy and provide reliable, repeatable performance for the most challenging applications.

www.cognex.com/machine-vision

3D VISION

Cognex In-Sight laser profilers and 3D vision systems provide ultimate ease of use, power and flexibility to achieve reliable and accurate measurement results for the most challenging 3D applications.

www.cognex.com/3D-vision-systems

VISION SOFTWARE

Cognex vision software provides industry leading vision technologies, from traditional machine vision to deep learning-based image analysis, to meet any development needs.

www.cognex.com/vision-software

BARCODE READERS

Cognex industrial barcode readers and mobile terminals with patented algorithms provide the highest read rates for 1D, 2D and DPM codes regardless of the barcode symbology, size, quality, printing method or surface.

www.cognex.com/BarcodeReaders





Connex)











Isotron Systems B.V. Afrikalaan 21-23 5232 BD, `s-Hertogenbosch Nederland Tel: +31(0)73 639 16 39 www.isotron.eu info@isotron.eu

Isotron Systems BVBA Antwerpsesteenweg 45 B-2830, Willebroek België (luxemburg) Tel: +32(0)3 450 70 45

© Copyright 2018, Cognex Corporation. All information in this document is subject to change without notice. Cognex, In-Sight, EasyBuilder, PatMax, VisionView, VisionPro, IDMax, 1DMax and PatQuick are registered trademarks of Cognex Corporation. Build Your Vision, In-Sight Explorer, PatMax RedLine, Cognex Connect, Cognex Designer, LineMax, OCRMax, QuickBuild, SurfaceFX and 2DMax are trademarks of Cognex Corporation. All other trademarks are the property of their respective owners. Printed in the USA. Lit. No. VG9001-2018-12-EN